




D8020 Series


Size: 80x80x20mm(3.15"x3.15"x0.78")

DIMENSION

OPERATING TEMPERATURE : Sleeve Bearing:- 10°C to + 70°C
 BALL BEARING: - 30°C to + 75°C
 INSULATION RESISTANCE :10 meg Ohms Min. @ 500 VDC
 (Between Frame and Terminal)
 DIELECTRIC STRENGTH : 5 mA Max. at 500 VAC 60 Hz
 for 1 minute
 (Between Frame and Terminal)
 WEIGHT : 59g (2.08 oz.)

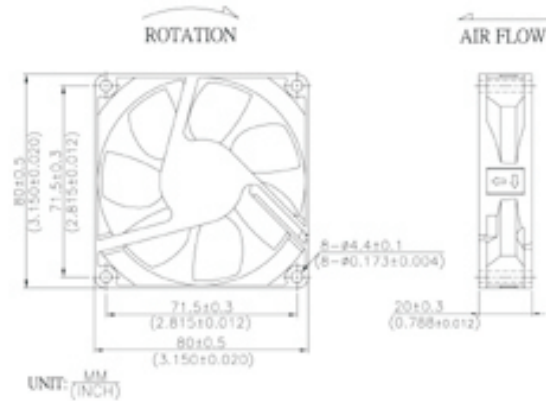

AIR PERFORMANCE

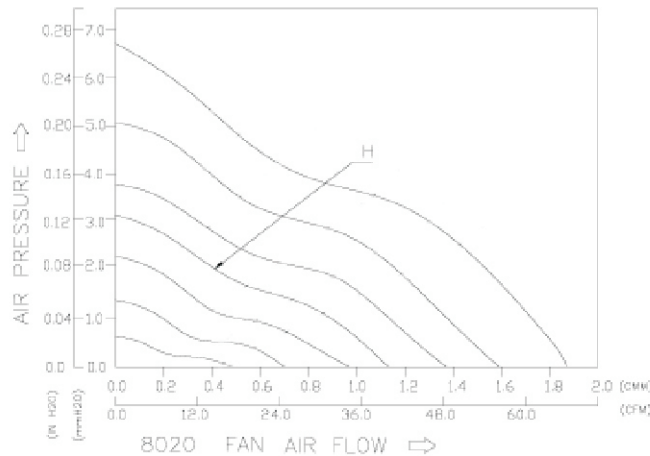

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	OPERATING VOLTAGE (V)	RATED CURRENT (A)	RATED POWER (W)	SPEED (RPM)	MAX. AIR AIR PRESSURE		AIR FLOW		NOISE dB(A) @ 1M
						mmH ₂ O	InchH ₂ O	CFM	CMM	
D8020V12H	12	6-13.8	0.60	7.20	4,440	5.02	0.198	56.44	1.598	44.4
D8020V24H	24	12~27.6	0.25	6.00	3,800	3.82	0.150	48.94	1.386	40.0
D8020V48H	48	24~52.8	0.12	5.76	3,200	3.08	0.121	41.21	1.167	35.7