


## DF28 Series DC Cross Flow Fan




HOUSING	Metal / Aluminum
IMPELLER	Aluminum, diameter 30mm
BEARING	Ball
OPERATING TEMPERATURE	-20 °C to +70 °C
MOTOR TYPE	DC Brushless Motor
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
INSULATION	Class E
INSULATION RESISTANCE	10 meg Ohms Min.@500 VDC (Between Frame and Terminal)
SAFETY	Impedance Protected

MODEL NO.	DIMENSION (MM)			RATED VOLTAGE (V)	OPERATING VOLTAGE (V)	RATED CURRENT (A)	SPEED RPM	MAX. AIR PRESSURE (mmH <sub>2</sub> O)	AIR FLOW		NOISE dB(A) @ 1M	WEIGHT (g)
	A	B	C						CFM	m <sup>3</sup> /min		
DF28076V12	76	86	112	12	10.2~13.8	0.10	3700	1.0	10.60	0.30	38	120
DF28076V24	76	86	112	24	16~26	0.10	4000	1.1	11.30	0.32	41	120
DF28098V12	98	108	134	12	10.2~13.8	0.10	3600	1.1	13.07	0.37	39	130
DF28098V24	98	108	134	24	16~26	0.10	3900	1.2	14.13	0.40	42	130

Unit:mm

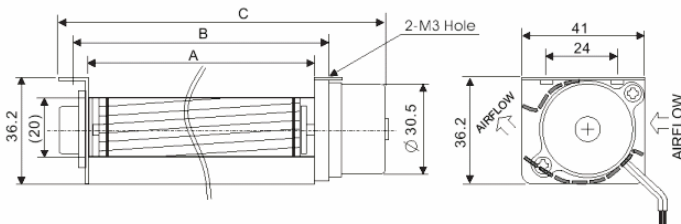

**DF28076V12** —  
**DF28076V24** —



**DF28098V12** —  
**DF28098V24** —

